


JDF-100F

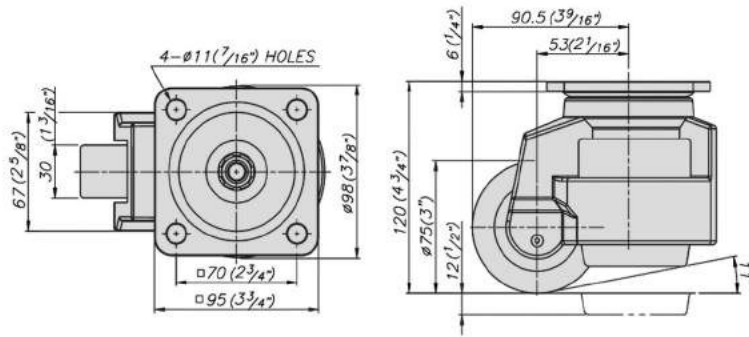

产品说明 PRODUCT DESCRIPTION

- ① 脚轮座(top plate): 碳钢冲压(pressed steel plate)
- ② 脚轮壳(frame): 铝制(al diecasted)
- ③ 手把(handle): ABS resin handle
- ④ 底座(leveling pad): NBR resin cushion
- ⑤ 轮子(wheel): 尼龙6(nylon6)
- ⑥ 表面处理(finish): 喷涂&镀锌
powder coated&zinc galvanized



选择事项 SELECT ITEMS

- ▶ 防静电底座 Variety of cushion available
- ▶ 防静电聚氨酯轮子 Antistatic polyurethane wheels
- ▶ 黑色脚轮壳 Black finish is available

规格 SPEC (°C/mm/kg)

Wheel Diameter	75 mm
Width of Tread	30 mm
Hardness of Tread	70S hore D
Size of Plate	95 × 95 mm
Plate Hole Centers	70 × 70 mm
Plate Hole	11 mm
Leveling Extent	12 mm
Offset	53 mm
Overall Height	120 mm
Load Capacity / 1 pcs	750 kg
Load Capacity / 4 pcs	1500 kg

JDF-100S

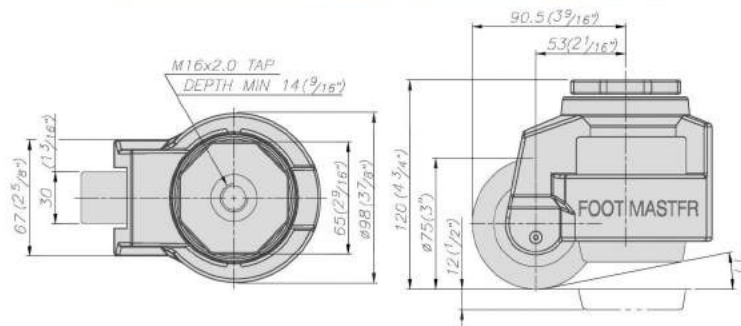

产品说明 PRODUCT DESCRIPTION

- ① 脚轮座(top plate): 碳钢冲压(pressed steel plate)
- ② 脚轮壳(frame): 铝制(al diecasted)
- ③ 手把(handle): ABS resin handle
- ④ 底座(leveling pad): NBR resin cushion
- ⑤ 轮子(wheel): 尼龙6(nylon6)
- ⑥ 表面处理(finish): 喷涂&镀锌
powder coated&zinc galvanized

选择事项 SELECT ITEMS

- ▶ 防静电底座 Variety of cushion available
- ▶ 防静电聚氨酯轮子 Antistatic polyurethane wheels
- ▶ 黑色脚轮壳 Black finish is available

规格 SPEC (°C/mm/kg)

Wheel Diameter	75 mm
Width of Tread	30 mm
Hardness of Tread	70 Shore D
Center Bolt	m16
Bolt Length	35 mm
Leveling Extent	12 mm
Offset	53 mm
Overall Height	120 mm
Load Capacity / 1 pcs	750 kg
Load Capacity / 4 pcs	1500 kg