


ENWALK™
Towards Future

Brighto

126/126A/126Li

RECHARGEABLE
24X7 LED LIGHT

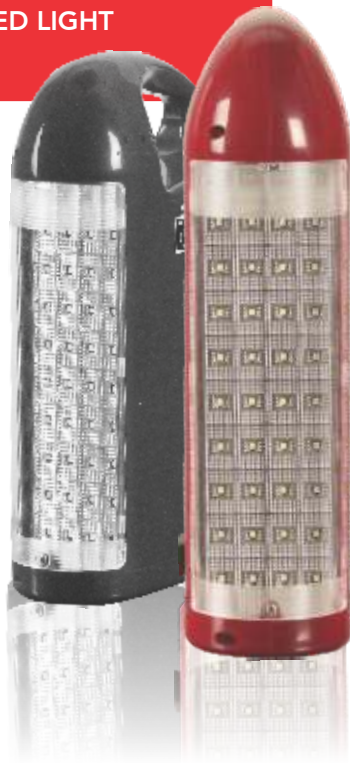

With Mobile
Charging



*upto
12 Hours of
backup

80%

Energy
Saving



12 Months
Warranty

Technical Specifications

	BRIGHTO 126	BRIGHTO 126 A	BRIGHTO 126 Li
A/C Input	90-277V AC/50Hz	90-277V AC/50Hz	90-277V AC/50Hz
Lantern Wattage	2.8 watts	2.8 watts	2.8 watts
Number of LEDs	40	40	40
Back-up Time Expected ***			
High Mode-Full Brightness	6 Hours	12 Hours	6 Hours
Low Mode-Medium Brightness	12 Hours	24 Hours	12 Hours
Mobile Charging O/P with USB	5.5 V/350mA	5.5 V/350mA	5.5 V/350mA
Battery	Lead Acid 4V/4.5Ah	Lead Acid 6V/4.5Ah	Lithium Ion 3.7V/4.4Ah
Recharge Time (Time needed to charge battery)	8 Hours	8 Hours	8 Hours
Temperature Rating (Ambient)	- 5 to 50° Celsius	- 5 to 50° Celsius	- 5 to 50° Celsius
Indicator	2 Color Indicator Red+Green-Mobile Chg. Green-Battery Chg. Red-Battery Low	2 Color Indicator Red+Green-Mobile Chg. Green-Battery Chg. Red-Battery Low	2 Color Indicator Red+Green-Mobile Chg. Green-Battery Chg. Red-Battery Low

*** Back-up Time reduces if Mobile is used

Special Features

- Single Touch Button for Multi Functions.
- In-Built Mobile Charging System.
- In-Built Mains 90-277 Volts SMPS Charger.
- In-Built Lead Acid / Lithium Ion Battery System.
- Two Levels Lighting possible for energy conservation.
- Lights and Mobile Charging Function on while charging, so truly 24/7 availability.
- Battery Cut Out for ensuring Minimum Lighting availability.

Sales Inquiry:

enwalk@auraeco.com

Manufactured & Marketed by:

Arham Electronics & Electricals

Pune 411 041, Maharashtra. India.

Tel.: +91-9922999720, 9822030258

www.enwalk.com